




DIMENSIONS TGF

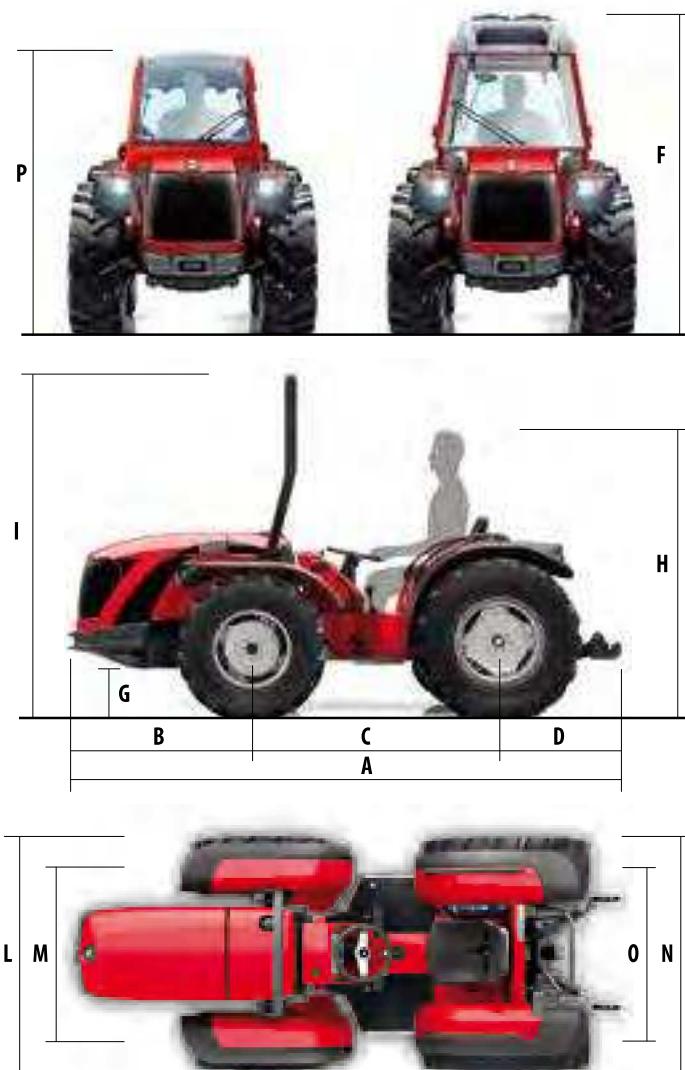

Front wheels

8.25-16 E 230/9.05	250/80-16 250/9.84	300/80-15.3 300/11.8	320/65 R18 320/12.6	260/70 R16 260/10.2	300/80-15.3 300/11.8	11.2 R20 275/10.8	320/70 R20 320/12.6	400/55-22.5 Twin 400/15.7

Rear wheels

11.2 R20 E 275/10.8	320/70 R20 320/12.6	360/70 R20 360/14.2	420/65 R20 420/16.5	340/65 R18 340/13.4	380/70 R20 380/14.9	320/85 R24 320/12.6	360/70 R24 360/14.2	500/60-22.5 Twin 500/19.7

Wheels

Dimensions (mm/inch)

Front	Rear	A	B	C	D	F	G	H**	I	L*	M	N*	O	P
8.25-16	11.2 R20	3385/133.2	1190/46.8	1530/60.2	665/26.2	2055/80.9	255/10.0	1747/68.7	2300/90.5	1330/52.3	1100/43.3	1325/52.1	1050/41.3	1775/69.9
250/80-16	320/70 R20	3385/133.2	1190/46.8	1530/60.2	665/26.2	2055/80.9	255/10.0	1747/68.7	2300/90.5	1385/54.5	1145/45.1	1370/53.9	1050/41.3	1775/69.9
300/80-15.3	360/70 R20	3385/133.2	1190/46.8	1530/60.2	665/26.2	2090/82.3	275/10.8	1767/69.5	2320/91.3	1470/57.9	1170/46.0	1415/55.7	1060/41.7	1800/70.8
320/65 R18	420/65 R20	3385/133.2	1190/46.8	1530/60.2	665/26.2	2090/82.3	275/10.8	1767/69.5	2320/91.3	1460/57.5	1140/44.9	1550/61.0	1130/44.5	1800/70.8
260/70 R16	340/65 R18	3385/133.2	1190/46.8	1530/60.2	665/26.2	1985/78.1	185/7.28	1677/66.0	2230/87.8	1380/54.3	1120/44.1	1595/62.8	1250/49.2	1740/68.5
• 300/80-15.3	380/70 R20	3385/133.2	1190/46.8	1530/60.2	665/26.2	2090/82.3	275/10.8	1767/69.5	2320/91.3	1470/57.9	1170/46.0	1440/56.7	1060/41.7	-
• 11.2 R20	320/85 R24	3385/133.2	1190/46.8	1530/60.2	665/26.2	2145/84.4	330/13.0	1822/71.7	2375/93.5	1415/55.7	1140/44.9	1390/54.7	1070/42.1	-
• 320/70 R20	360/70 R24	3385/133.2	1190/46.8	1530/60.2	665/26.2	2145/84.4	330/13.0	1822/71.7	2375/93.5	1460/57.5	1140/44.9	1475/58.1	1120/44.1	-
• 400/55-22.5	500/60-22.5	3385/133.2	1190/46.8	1530/60.2	665/26.2	2145/84.4	330/13.0	1822/71.7	2375/93.5	1610/63.4	1210/47.6	1660/65.3	1160/45.6	-

• Wheels not available with Protector 100 cab

* Min. external width

** Height calculated with the operator of average height sitting (cm/in 175/68.9)