



MITSUBISHI TRACTOR



MT28/MT36

Sensitivity that has been continuously built.

NEW

Mitsubishi Compact Tractor
cover all aspects of Ground and Lawn care


F&R Synchro Shuttle Lever



One Touch Independent PTO Clutch



High Lift Capacity of 3P-link

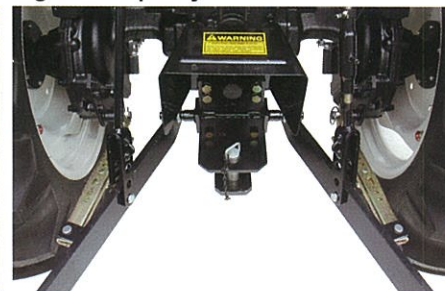

Specifications

MODEL		MT28	MT28H	MT36	MT36H
Engine	Model	S3L2		S3L3L	
	Type	4 cycle, Water-Cooled Diesel			
	Max.output PS(kW)/rpm	28(20.6)/2600		36.2(27.0)/2600	
	PTO HP	20	19.5	28	27.5
	No. of Cylinders	3		3	
	Displacement (cc)	1318		1662	
Fuel System	Fuel Capacity (litter)	24.5			
	Injection Type	I.D.I			
	Engine Start	key			
Drivetrain	Transmission Type	Gear	HST	Gear	HST
	Speeds	8F-8R	3Range	8F-8R	3Range
	Shuttle (F&R)	synchro	N/A	synchro	N/A
	Brakes	Wet Disc			
Hydraulics	Position Control	Standard			
	Main Pump Capacity (L/min)	29.6		29	
	Steering Pump Capacity (L/min)	12.7		12.7	
	Draft Control	Option			
	Auxiliary Valve	Option			
PTO	Type	Independent	Live	Independent	Live
	Rear PTO RPM (rpm)	540/1000	540	540/1000	540
	Mid PTO	N/A	Option(2000)	N/A	Option(2000)
Steering	Power Steering	Hydrostatic(Standard)			
	Min Turning Radius (m) (W/AG Tyre Brake)	2.4			
Hitch	Type	Category I			
	Lift Capacity at Hitch ball (kgf)	1200			
Tyres	AG Tyre Front	7-16	7-16	7-16	7-16
	Rear	11.2-24	11.2-24	12.4-24	12.4-24
	Turf Tyre Front	25×8.50-14	25×8.50-14	212/80D15	212/80D15
	Rear	13.6-16	13.6-16	355/80D20	355/80D20
Dimensions (W/AG Tyres)		at 7-16/11.2-24		at 7-16/12.4-24	
	Wheelbase (mm)	1710		1750	
	Overall Width (mm)	1400		1400	
	Overall Length (mm)	3190		3190	
	Hight (Top of Rear ROPS) (mm)	2385		2410	
	(Top of Front ROPS) (mm)	2225		2235	
	Ground Clearance (mm)	330			
	Weight (Rear ROPS) (kg)	1170	1175	1205	1210
	(Front ROPS) (kg)	1190	1195	1225	1230

Specifications subject to change without notice.



MITSUBISHI
AGRICULTURAL MACHINERY CO., LTD.

Gotanda Nomura Shoken Bldg. 6th Floor
1-5-1, Nishigotanda, Shinagawa-ku,
Tokyo 141-0031 Japan
<http://www.mam.co.jp>