


Desna konzola	T7.170		T7.185		T7.200		T7.210		T7.220		T7.235		T7.250		T7.260	
	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder
<b>MOTOR</b>	NEF		NEF		NEF		NEF		NEF		NEF		NEF		NEF	
Broj cilindara	6		6		6		6		6		6		6		6	
Common rail	•		•		•		•		•		•		•		•	
ECOBlue™ - SCR (selektivna katalitička redukcija)	•		•		•		•		•		•		•		•	
Nominalna snaga motora KS(kW)	125(92)		140(103)		155(114)		165(121)		167(123)		185(136)		200(147)		218(158)	
Max snaga motora sa EPM KS(kW)	171(126)		188(138)		203(149)		212(156)		218(160)		234(172)		250(184)		260(191)	
Okretaji motora (o/min)	2200		2200		2200		2200		2200		2200		2200		2200	
Usis (Turbo+Intercooler)	•		•		•		•		•		•		•		•	
Broj ventila po cilindru	4		4		4		4		4		4		4		4	
Volumen motora (cm <sup>3</sup> )	6728		6728		6728		6728		6728		6728		6728		6728	
Max okretni moment (Nm)	612@1500		679@1500		740@1500		766@1500		825@1500		862@1500		927@1500		995@1500	
Max okretni moment s EPM (Nm)	741@1500		810@1500		866@1500		912@1500		960@1500		1019@1500		1082@1500		1120@1500	
Ventilator s visko spojkom	•		•		•		•		•		•		•		•	
Povratni rad ventilatora radi čišćenja hladnjaka	○		○		○		○		○		○		○		○	
Motorna kočnica	○		○		○		○		○		○		○		○	
Spremnik goriva (l)	270		270		330		330		395		395		395		395	
Spremnik AdBlue-a (l)	48		48		48		48		48		48		48		48	
<b>MJENJAC</b>																
<b>Range Command™ – Semi Powershift</b>	•		•		•		•		—		—		—		—	
18x6	•		•		•		•		—		—		—		—	
19x6 Economy (40 km/h)/50 km/h	○		○		○		○		—		—		—		—	
28x12 – s pužnim brzinama	○		○		○		○		—		—		—		—	
Min. brzina / s pužnim brzinama (km/h)	2.4 / 0.40		2.4 / 0.40		2.2 / 0.37		2.0 / 0.34		—		—		—		—	
Automatsko mijenjanje brzina	•		•		•		•		—		—		—		—	
<b>Power Command™ – Full Powershift</b>	○		○		○		○		•		•		•		•	
18x6	○		○		○		○		•		•		•		•	
19x6 Economy (40 km/h)/50 km/h	○		○		○		○		○		○		○		○	
28x12 – s pužnim brzinama	○		○		○		○		○		○		○		○	
Min. brzina / s pužnim brzinama (km/h)	1.9 / 0.31		1.9 / 0.31		1.8 / 0.29		1.8 / 0.29		1.98/0.33		1.98/0.34		1.98/0.35		1.98/0.36	
Automatsko mijenjanje brzina	•		•		•		•		•		•		•		•	
<b>OSOVINE</b>																
4WD pogon	•		•		•		•		•		•		•		•	
Terra Glide™ - suspenzija prednje osovine	○		○		○		○		○		○		○		○	
Fast Steer™ - sustav upravljanja	○		○		○		○		○		○		○		○	
Super Steer™ - prednja osovina	○		○		○		○		○		○		○		○	
Hidraulička kočnica za prikolicu	○		○		○		○		○		○		○		○	
Zračne kočnice za prikolicu	○		○		○		○		○		○		○		○	
Kut zakrenutosti prednje osovine (°)	55/65		55/65		55/65		55/65		55/65		55/65		55/65		55/65	
<b>HIDRAULIKA</b>																
Hidraulični krug	zatvoreni		zatvoreni		zatvoreni		zatvoreni		zatvoreni		zatvoreni		zatvoreni		zatvoreni	
Max broj distributora straga	4   5		4   5		4   5		4   5		4   5		4   5		4   5		4   5	
Max broj distributora bočno	3		3		3		3		4		4		4		4	
Upravljanje hidrauličkim distributorima	Meh	El. hid	Meh	El. hid	Meh	El. hid	Meh	El. hid	Meh	El. hid	Meh	El. hid	Meh	El. hid	Meh	El. hid
Upravljanje hidrauličnim distributorima pomoću joysticka	○		○		○		○		○		○		○		○	
Kapacitet hidraulične pumpe S/O (l/min)	113		113		113		113		120/150		120/150		120/150		120/150	
Upravljanje stražnjim podiznim polugama	EDC		EDC		EDC		EDC		EDC		EDC		EDC		EDC	
Lift-O-Matic™	•		•		•		•		•		•		•		•	
Hidraulična toplina poluga	○		○		○		○		○		○		○		○	
Max podizna moć na kraju stražnjih poluga (kg)	8257		8257		8257		8257		10463		10463		10463		10463	
Max podizna moć 610 mm iza kugli poluge (kg)	6616		6616		6616		6616		9266		9266		9266		9266	
Prednje podizne poluge	○		○		○		○		○		○		○		○	
Max podizna moć na kraju prednjih poluga	3568		3568		3568		3568		3785		3785		3785		3785	
Kategorija kopčanja na stražnjim polugama	KAT. 3		KAT. 3		KAT. 3		KAT. 3		KAT. 3		KAT. 3		KAT. 3		KAT. 3	
<b>PRIKLJUCNO VRATILO (PV)</b>																
Meki uklop priključnog vratila	•		•		•		•		•		•		•		•	
Brzina motora pri																
540/1000 (o/min)	1969/1924		1969/1924		1969/1924		1969/1924		1893/1950		1893/1950		1893/1950		1893/1950	
540E/1000 (o/min)	—		—		—		—		1569/1893		1569/1893		1569/1893		1569/1893	
540/540E/1000 (o/min)	1969/1546/1893		1969/1546/1893		1969/1546/1893		1969/1546/1893		—		—		—		—	

	T7.170		T7.185		T7.200		T7.210		T7.220		T7.235		T7.250		T7.260	
Desna konzola	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder	Standard	Sidewinder
540/540E/1000/1000E (o/min)	—		—		—		—		1931/1598/1912/1583		1931/1598/1912/1583		1931/1598/1912/1583		1931/1598/1912/1583	
Automatskog uključivanja PV	○	●	○	●	○	●	○	●	○	●	○	●	○	●	○	●
Prednje PV – 1000 (o/min)	○		○		○		○		○		○		○		○	
<b>KABINA</b>																
Zračna suspenzija sjedala	●		●		●		●		●		●		●		●	
Klima uređaj	●		●		●		●		●		●		●		●	
Radio CD MP3	●		●		●		●		●		●		●		●	
Auto Comfort™ grijano sjedalo vozača	○		○		○		○		○		○		○		○	
Teleskopski retrovizori	●		●		●		●		●		●		●		●	
Prozirni krovni otvor	●		●		●		●		●		●		●		●	
Monitor učinka s tipkovnicom	○		○		○		○		○		○		○		○	
IntelliView™ ekran osjetljiv na dodir	○		○		○		○		○		○		○		○	
Razina buke	70		70		70		70		70		70		70		70	
<b>OSTALA DODATNA OPREMA</b>																
Xenon svjetla na poklopcu motora	○		○		○		○		○		○		○		○	
Xenon radna svijetla	○		○		○		○		○		○		○		○	
Rotaciono svjetlo	○		○		○		○		○		○		○		○	
Zračni kompresor	○		○		○		○		○		○		○		○	
Metalna podna zaštita	○		○		○		○		○		○		○		○	
Metalna rešetkasta zaštita stakala	○		○		○		○		○		○		○		○	
Karbonski filtri kabine	○		○		○		○		○		○		○		○	
Hidraulička kuka za vuču	○		○		○		○		○		○		○		○	
Utezi na stražnjim kotačima	○		○		○		○		○		○		○		○	
Priprema za automatsko upravljanje	○		○		○		○		○		○		○		○	
<b>MASA</b>																
Ukupna masa bez utega (kg)	5800		5800		6000		6000		6950		6950		6950		6950	

● standardno ○ opcija - nije moguće

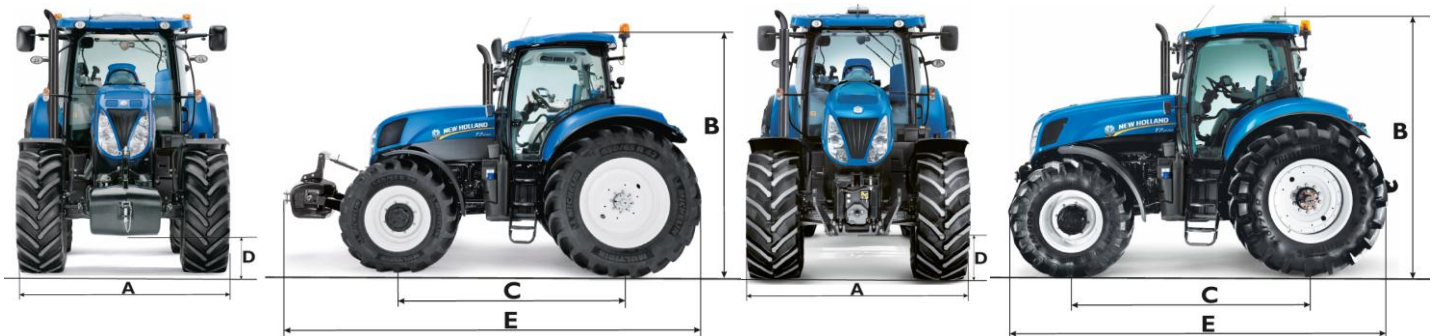

DIMENZIJJE	T7.170 – T7.210			T7.220 – T7.260		
	520/70R38	650/65R38	650/65R42	650/65R38	650/60R42	710/60R42
Dimenzije stražnjih guma *						
Minimalna širina (A) (mm)	2446	2446	2446	2470	2470	2470
Ukupna visina (B) (mm)	3040	3090	3140	3065	3115	3165
Međuosovinski razmak (C) (mm)						
Standardna osovina	2734	2734	2734	2884	2884	2884
SuperSteer osovina	2880	2880	2880	2977	2977	2977
Klirens (D) (mm)	515	540	565	423	473	523
Ukupna duljina (E) (mm)	5347	5347	5347	5773	5773	5773

\* Ostale moguće dimenzije stražnjih guma: T7.170 – T7.210 = 520/70R38, 600/65R38, 650/60R38, 580/70R38, 650/65R38, 710/60R38, 18.4R38, 20.8R38, 18.4R42. Za T7.200 i T7.210 moguće su još 20.8R42, 650/65R42, 580/70R42. Za modele T7.220 – T7.260 = 520/85R38, 580/70R38, 650/75R38, 710/70R38, 460/85R42, 580/85R42, 580/70R42, 620/70R42